

SonoSite

FUJIFILM
Value from Innovation

SonoSite SII


Gen MB

Transducer

Patient

Annotate

Settings

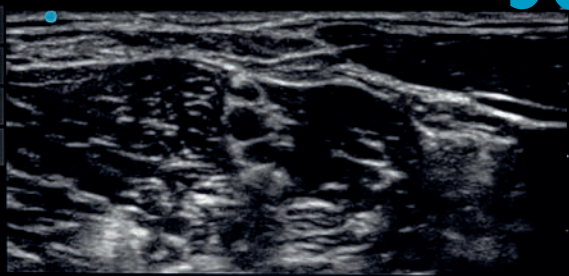

Nrv
MI
99%
MI
0.7
TIS
0.1
144

1.8

144

Callipers

Calcs

Zoom

Two circular knobs and a rectangular button with a double arrow icon.

M

C

2D

EMPOWERING
EFFICIENCY.




TRANSFORMING THE
PACE OF YOUR PRACTICE,
THROUGH SIMPLY,
SMART ULTRASOUND.


The SII empowers your efficiency through an intuitive, yet smart user interface that adapts to your imaging needs. The system is portable and can be used across multiple hospital environments, including a zero footprint option for space-constrained rooms. We listened to you and designed the SII system to maximise the productivity of your practice, and support you in providing simply the best patient care.




HFL38xi – Internal Jugular Vein

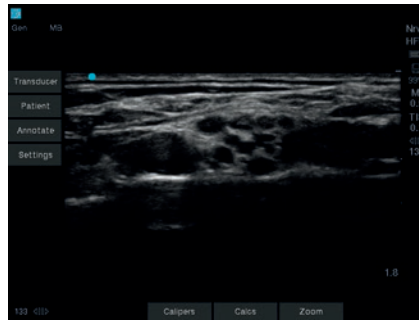


HFL38xi – Supraclavicular

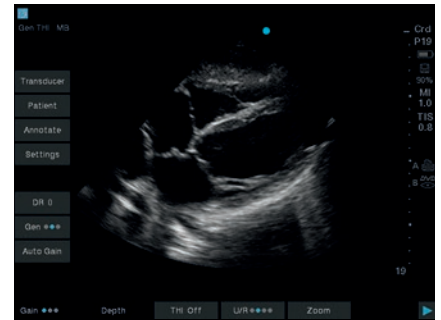

rP19x – Subcostal Cardiac

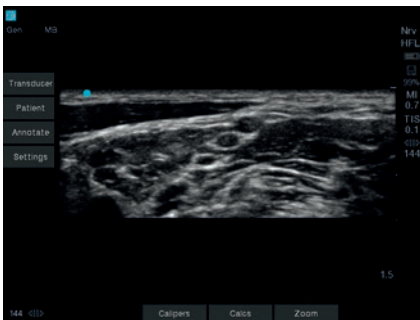

HFL38xi – Interscalene

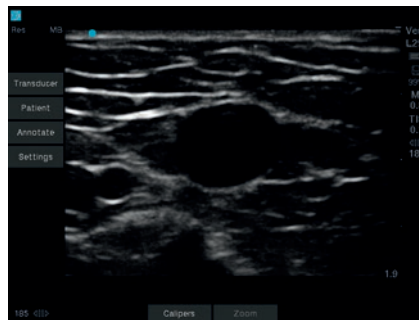

L25x – Basilic Vein



rC60xi – Portal Vein

VISUALISATION, CLEARLY ENHANCED.

ELEVATED COLOUR SENSITIVITY

Through a dual flex and thin lens design, combined with new advancements in image optimisation, the HFL38xi was engineered for increased penetration, clarity, and colour sensitivity. You can now better visualise nerves and vessels, whether it be for procedural guidance or flow analysis.

OPTIMISED IMAGING EXPERIENCE

DirectClear Technology is a novel, patent-pending process that elevates transducer performance:

- Improved penetration and contrast resolution: Unlike conventional SonoSite transducers, a more efficient material has been embedded into the design that allows for the generation of more acoustic signal. In parallel, a reflective layer has been added to reduce the loss of this signal, as it is transmitted into the patient.
- Sharpened detail resolution: An additional layer has been added to provide a better acoustic match between the transducer and the patient, increasing the ability to resolve small structures and aid in your diagnostic confidence.

SonoSite S11

INTELLIGENCE,
INSPIRED BY YOU.



- A Touchscreen menu automatically adapts to your needs
- B Tactile knobs for gain and depth control
- C Virtual track pad displays only when needed
- D Flexible control of caliper, zoom, and colour box through virtual track pad or touchscreen
- E Easy access to commonly used controls (Mode, Print, Save)
- F Embedded Dual Transducer Connector: Switch exam types or transducers with two taps on the screen

WORKFLOW EXTENDED,
FROM SYSTEM TO STAND.

- G Lockable drawer with tray behind system
- H Dedicated gel bottle holder
- I Elevated transducer holders
- J Large storage basket



SONOSITE SII TRANSDUCERS



L38xi ●●

10-5 MHz Linear

Applications:

lung, nerve, small parts, arterial, venous

Scan depth: 9 cm



HFL38xi ●●

13-6 MHz Linear

Applications:

breast, lung, musculoskeletal, nerve, ophthalmic, small parts, arterial, venous

Scan depth: 6 cm



HFL50x ●

15-6 MHz Linear

Applications:

breast, musculoskeletal, nerve, small parts

Scan depth: 6 cm



L25x ●●●●

13-6 MHz Linear

Applications:

lung, musculoskeletal, nerve, superficial, arterial, venous, ophthalmic

Scan depth: 6 cm



C11x

8-5 MHz Curved

Applications:

abdominal, neonatal, nerve, venous, arterial, cardiology (vet)

Scan depth: 13 cm



rC60xi ●●●●

5-2 MHz Curved

Applications:

abdominal, musculoskeletal, nerve, ob, gyn

Scan depth: 30 cm



ICTx ●

8-5 MHz Curved

Applications:

ob, gyn

Scan depth: 13 cm



rP19x ●●●●

5-1 MHz Phased

Applications:

abdominal, cardiology, lung, ob

Scan depth: 35 cm



P10x ●

8-4 MHz Phased

Applications:

paed. abdominal, paed. cardiology, neonatal head

Scan depth: 14 cm



HSL25x

13-6 MHz Linear

Applications:

lung, musculoskeletal, nerve, superficial, arterial, venous, ophthalmic

Scan depth: 6 cm



L52x (Vet) ●

10-5 MHz Linear

Applications:

musculoskeletal, ob, arterial

Scan depth: 15 cm



C35x ●

8-3 MHz Curved

Applications:

abdominal, musculoskeletal, nerve, ob, spine

Scan depth: 16 cm



C8x ●

8-5 MHz Curved

Applications:

prostate

Scan depth: 11.5 cm

- DirectClear Technology.
- Optional Armoured Cable.
- Needle guides and kits available.
- A transverse needle guide available.

SYSTEM SPECIFICATIONS

System weight	5.70 kg/12.6 lbs. with battery
Dimensions	44.7 cm x 29.3 cm x 12.3 cm/ 17.6" x 11.5" x 4.8"
Display	30.7 cm/12.1" diagonal LCD (NTSC or PAL) with chemically-etched glass layer
Viewing Angles	85° up/down/left/right
Architecture	All-digital broadband
Dynamic range	Up to 165 dB
Gray scale	256 shades
HIPAA compliance	Comprehensive tool set

MOUNTING OPTIONS

Video Electronics Standards Association (VESA™)
Mounting: (75 mm x 75 mm / 2.9" x 2.9") and
(100 mm x 100 mm / 3.9" x 3.9")

IMAGING MODES

2D / Tissue Harmonic Imaging / M-Mode
Color Doppler and Velocity Color
Pulsed Wave Doppler / Continuous Wave Doppler /
ECG

IMAGE PROCESSING

SonoADAPT™ Tissue Optimisation
SonoHD2™ Imaging Technology
Dual Imaging, Duplex Imaging, 2x pan/zoom
capability, Dynamic range and gain
ColorHD™ Technology

STEEP NEEDLE PROFILING

C35x – Nerve, MSK, Spine
HFL38xi – Nerve, MSK, Breast, Small Parts,
Arterial, Venous
HFL50x – Nerve, MSK, Breast, Small Parts
L25x – Nerve, MSK, Arterial, Venous
HSL25x – Nerve, MSK, Arterial, Venous
L38xi – Nerve
rC60xi – Nerve, MSK

USER INTERFACE

Gain control through tactile knob: overall, near, far
Depth control via tactile knob
Adaptive touchscreen display with menus optimised
for current system state
Easy access to commonly used controls on
capacitive touch pad. (Scan/Freeze, Modes, Print,
Save Clip, Save Image)
Touchscreen manipulation for Calipers, Zoom and
Colour Box (Virtual track pad also available)

TRANSDUCERS

Broadband/Multifrequency:
Armoured Cable Technology (optional on L38xi,
HFL38xi, L25x, rC60xi, rP19x, L52x)
Linear Array, Curved Array, Phased Array,
Micro-Convex
Centre line marker for linear transducers
Exam types: abdominal, breast, cardiology,
gyn, lung, musculoskeletal, neonatal, nerve, ob,
ophthalmic, small parts, spine, superficial, TCD,
arterial, venous
Embedded Dual Transducer Connector with 2-tap
transducer switching function

DURABILITY

Drop-tested at 91.4 cm/3 feet

APPLICATION SPECIFIC CALCULATIONS

OB/Gyn/Fertility: Diameter/ellipse measurements,
volume, ten follicle measurements, estimated foetal
weight, established due date, gestational age, last
menstrual period, growth charts, user-defined
tables, multiple user-selectable authors, ratios,
amniotic fluid index, patient report, humerus and
tibia measurement and charts, HR, Foetal HR, MCA,
UMB, Ovarian Volume, Follicle Volume, Uterine
Volume, Endometrial thickness
Arterial: Diameter/ellipse/trace measurements,
volume, volume flow, percent diameter and area
reduction, Lt/Rt CCA, ICA, ECA, ICA/CCA ratio, peak
trace, ICA/CCA ratio, angle correction, patient report,
HR, Bulb, Vertebral Artery, TAP
Cardiac: LVO, automated Cardiac Output package
and patient report including: ventricular, aortic and
atrial measurements; ejection fraction, volume
measurements, Simpson's rule, continuity equation,
pressure half-time and cardiac output; IVC Collapse
Ratio, LA/RA Volume, TAPSE, PA AT, TV E, A, PHT,
TVI, MV time, Pulm Veins, LV Mass, TDI e', TDI a',
HR, dP:dT, Qp/Qs
Ability to view EF and FS simultaneously
Transcranial Doppler (TCD): Complete TCD
package including Time Average Peak (TAP)

ONBOARD IMAGE AND CLIP STORAGE/REVIEW

16 GB internal flash memory storage capability
Storage support for up to 500 patients
Clip Store capability (maximum single clip length:
60 seconds)
Start/Stop toggle capability for clips
USB Auto Export
Encryption of patient data on system
Cine review up to 255 frame-by-frame images

MEASUREMENT TOOLS, PICTOGRAMS AND ANNOTATIONS

2D: Distance calipers, ellipse and manual trace
M-Mode: Distance and time measurements,
heart rate calculation
User-selectable text and pictograms
User-defined, application-specific annotations
Biopsy guidelines

CONNECTIVITY (EXTERNAL DATA MANAGEMENT)

SonoSite Patient Data Archival Software (PDAS) for
Wireless/Wired Image management
Telexy Qpath E exam management compatibility
DICOM® Image Management (TCP/IP): Print and
Store, Modality Work List, Storage Commit: Modality,
Perform, Procedure Step
Direct writing capability to USB 2.0 mass storage
removable media (PC and MAC compatible)
Supported export formats: MPEG-4 (H.264), JPEG,
BMP, and HTML

CONNECTIVITY (SYSTEM PORTS)

HDMI output to external display
Composite video output (NTSC/PAL) to VCR or
video printer
Audio output
Integrated speakers
Ethernet or wireless image/data transfer
2.4 GHz and 5 GHz Wireless: 802.11 (B, G and N
networking)
USB ports (3)

POWER SUPPLY

System operates via battery or AC power
Rechargeable lithium-ion battery
AC: universal power adapter, 100-240 VAC,
50/60 Hz input, 15 VDC output
Less than 25 sec. from power-on to scanning

SII STAND AND PERIPHERALS

Hydraulic height adjustment, shelf for printer
Elevated transducer holders
Dedicated gel holder
Tray with drawer on back of system
Large basket with easy removal feature for cleaning
(optional 2nd basket)
AC Cord Retainer
Cable management hooks for auxiliary cables
Optional foot switch
Optional PowerPark and PowerPack

OPTIONAL PERIPHERALS

Printers: Medical-grade black and white
External data input devices: Bar code reader
ECG Slave Cable and Adapter Kit: Used to
interface with external ECG monitors
ECG module: 3-lead ECG – works with standard
ECG leads and electrodes

Bluetooth is a registered trademark of Bluetooth SIG, Inc.

Mac is a trademark of Apple Inc., registered in the U.S. and other countries.

DICOM is the registered trademark of the National Electrical Manufacturers
Association for its standards publications relating to digital communications
of medical information.

FUJIFILM

Value from Innovation

FUJIFILM SonoSite European Headquarters

FUJIFILM SonoSite BV
Joop Geesinkweg 140
1114 AB Amsterdam
The Netherlands

SonoSite Ltd

Phone: +44 1462 341 151
E-mail: ukresponse@fujifilm.com
www.sonosite.com/uk

SonoSite Worldwide Offices

FUJIFILM SonoSite Australasia Pty Ltd: Australia 1300 663 516
FUJIFILM SonoSite Australasia Pty Ltd: New Zealand 0800 888 204
FUJIFILM SonoSite Brazil +55 11 5574 7747
FUJIFILM SonoSite Canada Inc. +1 888 554 5502
FUJIFILM (China) Investment Co., Ltd. +86 21 5010 6000
FUJIFILM SonoSite GmbH – Germany +49 69 80 88 40 30
FUJIFILM SonoSite, Inc. – USA +1 425 951 1200

FUJIFILM SonoSite India Pvt Ltd. +91 124 288 1100
FUJIFILM SonoSite Iberica SL – Spain +34 91 123 84 51
FUJIFILM Medical Co., Ltd. – Japan +81 3 0418 7190
FUJIFILM SonoSite Korea Ltd +65 6380 5589
FUJIFILM SonoSite Ltd – United Kingdom +44 1462 341 151
FUJIFILM SonoSite SARL – France +33 182 880 702